


ROOF HUGGER, LLC
P.O. BOX 127, ODESSA FL 33556
P: 800 771-1711
F: 877 202-2254
www.roofhugger.com



COPYRIGHT © 2019
A Member Company of LSI Group, Inc.

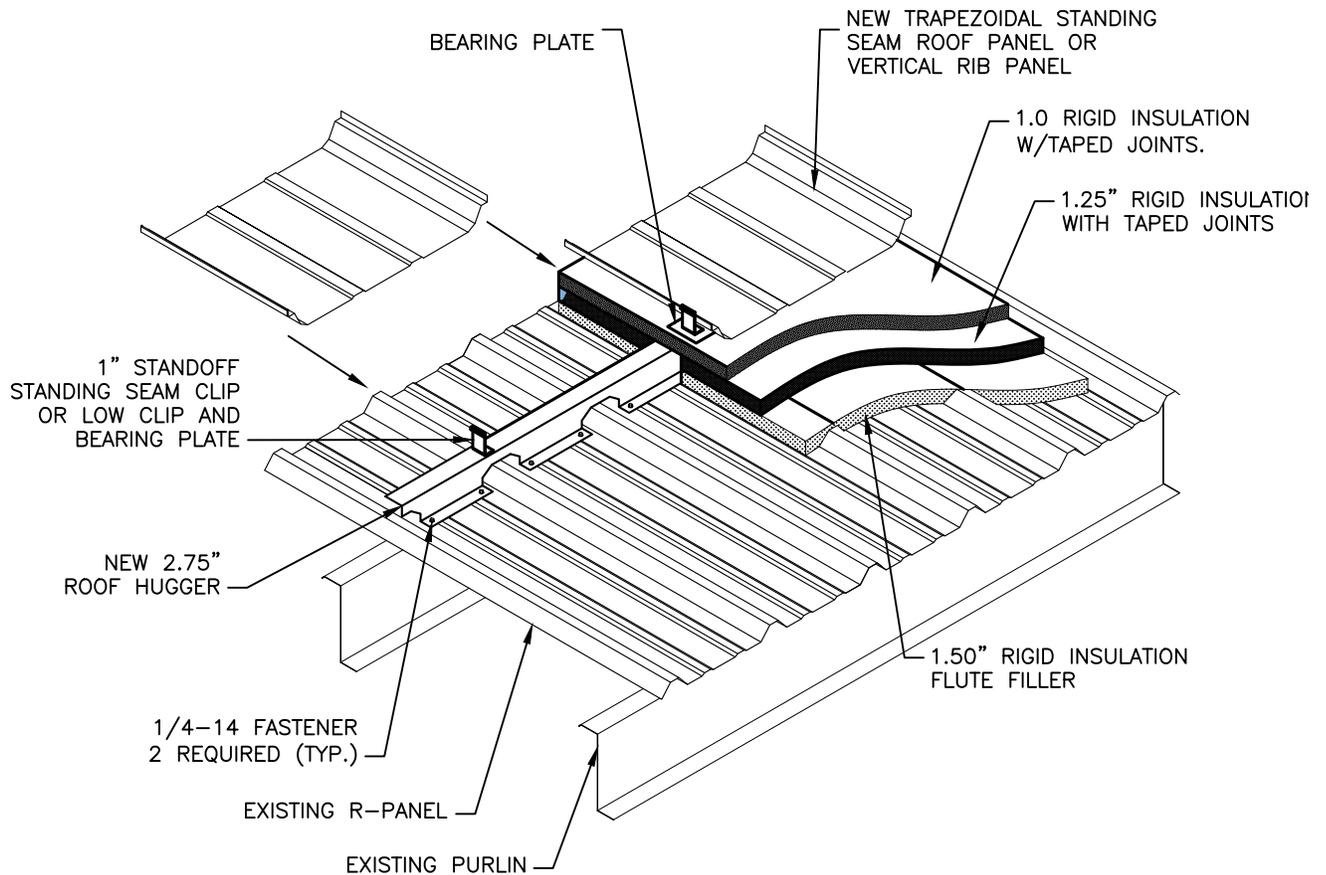

NOTE: ALL RIGID INSULATION VALUES ARE BASED ON POLYISOCYANURATE IN BOARDS WITH ALL TOP LAYER JOINTS AND SEAMS TAPED AND SEALED.

| System | 2.75" ROOF HUGGER WITH 3 LAYERS OF RIGID INSULATION | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------|--------------------|------------------------------------|------------------------------------------------------------------------------------|
| Roof Hugger Web Depth in Inches | Maximum Cavity Depth in Inches | Estimated R- Value | Estimated U- Value | Thermal Spacer Thickness in Inches | Blanket Thickness Combination Used |
| 2.75 | 3.75 | 22.8 | 0.044 | 0 | 1.50" FLUTE FILLER RIGID INSULATION; 1.25" RIGID INSULATION; 1.0" RIGID INSULATION |
| ALL FASTENERS, PANELS & INSULATION NOT BY ROOF HUGGER UNLESS NOTED OTHERWISE. | | | | | |
| SEE ROOF HUGGER INSTALLATION INSTRUCTIONS FOR INFORMATION CONCERNING EXISTING FASTENERS BEING REMOVED OR LEFT IN PLACE. | | | | | |
| ALL NEW ROOF SYSTEMS INCLUDING PANEL, FASTENERS, TRIM, AND ACCESSORIES (BY OTHERS) TO BE INSTALLED PER THAT MANUFACTURERS STANDARDS. | | | | | |

RIGID INSULATION VALUES
3 LAYERS - 3.75" TOTAL
TRAP. SSR. OVER PBR OR VERTICAL RIB

SCALE: NTS

16-3R-T-R
07/15/2019