


ROOF HUGGER, LLC
P.O. BOX 127, ODESSA FL 33556
P: 800 771-1711
F: 877 202-2254
www.roofhugger.com



COPYRIGHT © 2019
A Member Company of LSI Group, Inc.

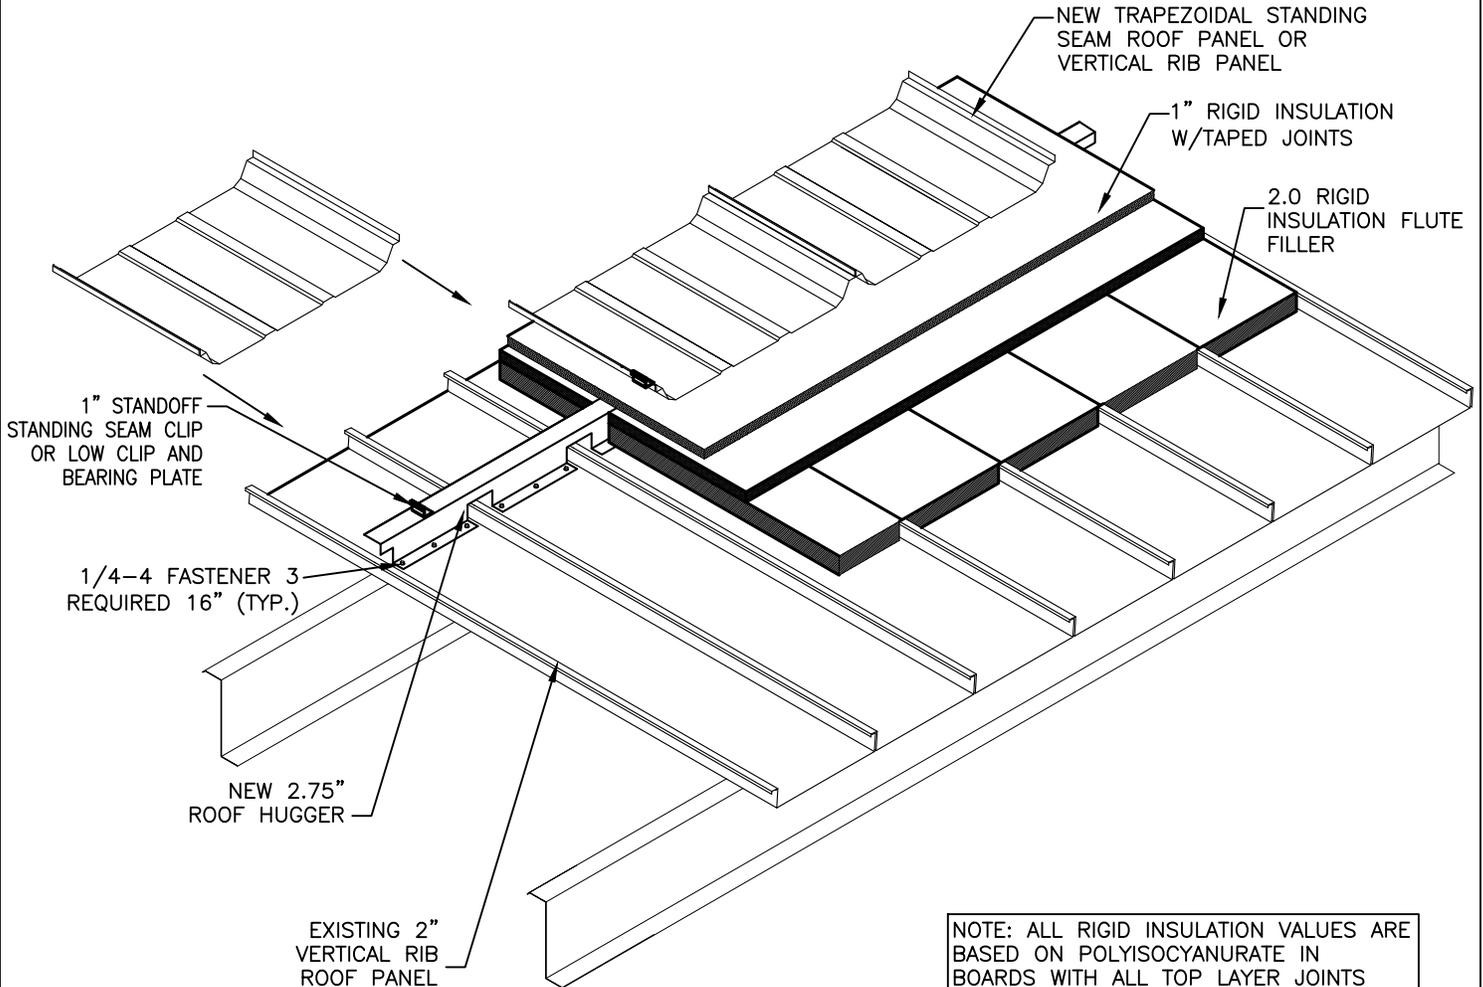

NOTE: ALL RIGID INSULATION VALUES ARE BASED ON POLYISOCYANURATE IN BOARDS WITH ALL TOP LAYER JOINTS AND SEAMS TAPED AND SEALED.

| 2.75" ROOF HUGGER WITH 3 LAYERS OF RIGID INSULATION | | | | | | |
|---|---------------------------------|--------------------------------|-------------------|-------------------|------------------------------------|--|
| System | Roof Hugger Web Depth in Inches | Maximum Cavity Depth in Inches | Estimated R-Value | Estimated U-Value | Thermal Spacer Thickness in Inches | Blanket Thickness Combination Used |
| | 2.75 | 3.75 | 22.8 | 0.044 | 0 | 2.00" FLUTE FILLER RIGID INSULATION; 0.75" RIGID INSULATION; 1.0" RIGID INSULATION |

ALL FASTENERS, PANELS & INSULATION NOT BY ROOF HUGGER UNLESS NOTED OTHERWISE.

SEE ROOF HUGGER INSTALLATION INSTRUCTIONS FOR INFORMATION CONCERNING EXISTING FASTENERS BEING REMOVED OR LEFT IN PLACE.

ALL NEW ROOF SYSTEMS INCLUDING PANEL, FASTENERS, TRIM, AND ACCESSORIES (BY OTHERS) TO BE INSTALLED PER THAT MANUFACTURERS STANDARDS.

CONSULT PANEL MANUFACTURE ABOUT PANEL RUMBLE IF NO INSULATION INSTALLED ABOVE ROOF HUGGER FRAMING.

RIGID INSULATION VALUES
3 LAYERS - 3.75" TOTAL
TRAP. SSR OVER VERTICAL SSR

SCALE: NTS

18-3R-T-V
07/15/2019